


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/20/07	~	LJC 04/20/07
B	整理图面	YCH 05/14/07	~	LJC 05/14/07
C	整理图面	YCH 10/17/07	~	LJC 05/14/07
H	ADD P/N CODE	JLZ 06/25/15'	~	

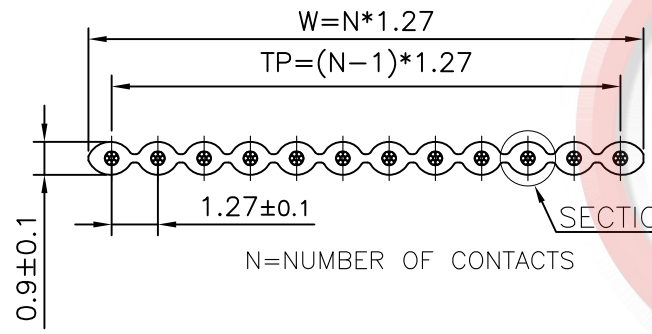

NOTES:

- Insulation material: PVC
Color: Grey
- SPECIFICATION
 - Rating: 300V
 - Conductor Size: 28AWG or 30AWG.
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature: -20°C~70°C.
- APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code
DS1057 - X X X X X-X

Packing Specifications
30.5: 30.5m/reel
61.0: 60.1m/reel
76.5: 76.5m/reel
153: 153m/reel


Edge mark
R: Red mark
F: Flower mark

Wire diameter
1: ∅0.100 (30AWG)
2: ∅0.127 (28AWG)
3: ∅0.090 (SPECIAL)


Wire AWG
28: 28AWG
30: 30AWG
T: SPECIAL (H)

Cable color
A: Gray
S: Dark Grey (C)

No. Of positions
06: 6pin
64: 64pin

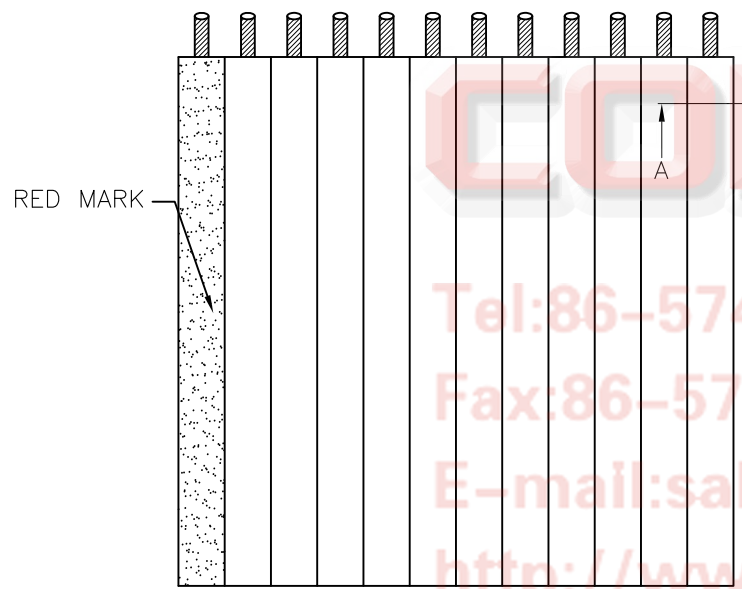

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
10	11.43	12.70	±0.30	∅0.100<0.397
14	16.51	17.78	±0.30	
16	19.05	20.32	±0.30	
20	24.13	25.40	±0.30	
24	29.21	30.48	±0.30	
26	31.75	33.02	±0.30	
30	36.83	38.10	±0.30	∅0.127<0.237
34	41.91	43.18	±0.40	
40	49.53	50.80	±0.40	
50	62.23	63.50	±0.40	
60	74.93	76.20	±0.40	
64	80.01	81.28	±0.40	

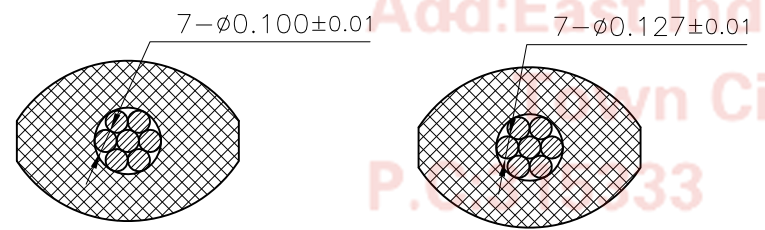

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2651 GRAY FLAT CABLE	
X.	±0.60	X.	±5°	UNITS	mm	SHEET	DS1057	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1057	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1 SHEET 1 OF 1						
DRAWING NO.		C-DS1057-XXXXX-X-H						